

930P-6-1/8

HAFNER

(HU) Dugaszolható könyök csatlakozó




Technical data

Kivitel	menetes
Port size / Connection	G 1/8"
Medium	Compressed air, water
Material seals	NBR
Temperature range	-20°C...+60°C
Operating pressure	0...16 bar
Material retaining ring	Nickel-plated brass
Material support ring	POM
O-gyűrű anyaga	NBR
Pressure range	0...16 bar
Port size Push-in connection	Ø6
Port size	Ø6
Material body	POM
Material release ring	POM
Rögzítő karom anyaga	Stainless steel
Csatlakozó hüvely anyaga	Nickel-plated brass
Material	POM

930P-6-1/8

HAFNER

(HU) Dugaszolható könyök csatlakozó

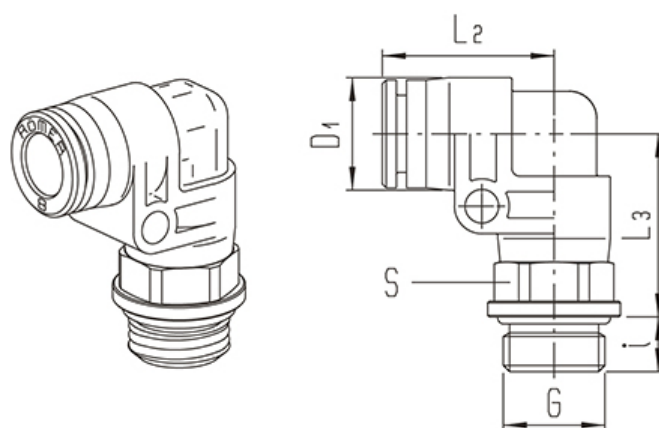

Type number	Tube size	Port size G	L2	L3	i	D1	S
930P-4-M5	4	M 5	14,5	11	3,5	10	8
930P-4-1/8	4	G 1/8"	18,5	20,5	5	12,5	12
930P-4-1/4	4	G 1/4"	18,5	20,5	7	12,5	12
930P-6-M5	6	M 5	16,5	11	3,5	12	8
930P-6-1/8	6	G 1/8"	19	20,5	5	12,5	12
930P-6-1/4	6	G 1/4"	19	20,5	7	12,5	12
930P-8-1/8	8	G 1/8"	22	22	5	14,5	14
930P-8-1/4	8	G 1/4"	22	23,5	7	14,5	14
930P-8-3/8	8	G 3/8"	22	24	8	14,5	14
930P-10-1/4	10	G 1/4"	26	25,5	7	17	17
930P-10-3/8	10	G 3/8"	26	27	8	17	17
930P-12-3/8	12	G 3/8"	31	30,5	8	23	22
930P-12-1/2	12	G 1/2"	31	31	9	23	24
930P-14-1/2	14	G 1/2"	31	31	9	23	24
930P-16-3/8	16	G 3/8"	32	32	8	25	24
930P-16-1/2	16	G 1/2"	32	32	9	25	24
930P-22-1/2	22	G 1/2"	40	41	9	34	32
930P-22-3/4	22	G 3/4"	40	40	11	34	32